


## Linestar



- Self-learning function for the transmitter and receiver.
- Adjustable end stop for precise open and close limits.
- Horizontally positioned control board on top of operator to allow for easy cable entry; control board fitted with protective cover.
- Coloured terminal connectors to identify accessories and simple connection.
- Red LED to signal mains power supply or green LED to show battery back up connection.

Perfect solution for DIY or home handyman gate automation. It has been designed for sliding gates where limited space is available, with its internally adjusted CAM design and no need for conventional.

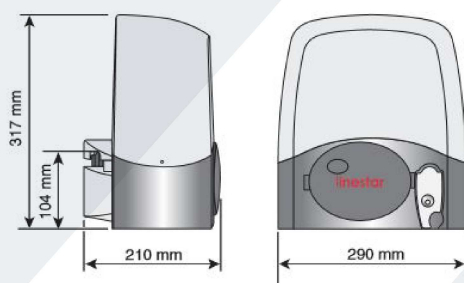

### TECHNICAL SPECIFICATIONS

Supply Voltage	230V AC 50/60 Hz
Motor Power Supply	24V DC
Power (W)	170W
Operating Speed	170mm per second
Duty Cycle	50%
Thrust (N)	300N
Max Leaf Weight	300kg
Operating T°	-20°C / +55°C

CODE	NAME	DESCRIPTION
001MS300	Linestar Kit Complete	1- Linestar Operator.2 - CLIK4M Remotes. 1 - MTR Receiver.4 LT-Rack
001MS301	Linestar Kit	1- Linestar Operator.2 - CLIK4M Remotes. 1 - MTR Receiver
001MS302	Linestar Operator	1- Linestar Operator

### Accessories

001CLI4M



Four button remote

00



Surface mounted photocells

MTR-BATT



Back up batteries